



CorePro Plastic LEDcandles & lusters



CorePro LEDcandle ND 5-40W E14 865 B35 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	E14
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Color Code	865 [CCT of 6500K]
Luminous Flux	470 lm
Color Designation	Cool Daylight
Luminous Efficacy (rated) (Nom)	94.00 lm/W
Correlated Color Temperature (Nom)	6500 K
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Photobiological safety according to EN 62471	RG1

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	5 W
Lamp Current (Nom)	44 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.51
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	81 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted

CorePro Plastic LEDcandles & lusters

Bulb Shape	B35
------------	-----

Approval and Application

Energy Consumption kWh/1000 h	5 kWh
EPREL Registration Number	453201
Energy Efficiency Class	F
EyeComfort	Yes
CE mark	Yes
EU RoHS compliant	Yes

Application Conditions


can it be used in closed luminaires	No
-------------------------------------	----

Product Data

Order product name	CorePro candle ND 5-40W E14 865 B35 FR
--------------------	--



Full product name	CorePro LEDcandle ND 5-40W E14 865 B35 FR
Full product code	871951431258600
Order code	31258600
Material Nr. (12NC)	929002969202
Net Weight (Piece)	0.040 kg
EAN/UPC - Product/Case	8719514312586
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514312593

Dimensional drawing

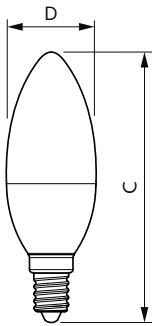

Product	D	C
CorePro candle ND 5-40W E14 865 B35 FR	35 mm	106 mm

Photometric data

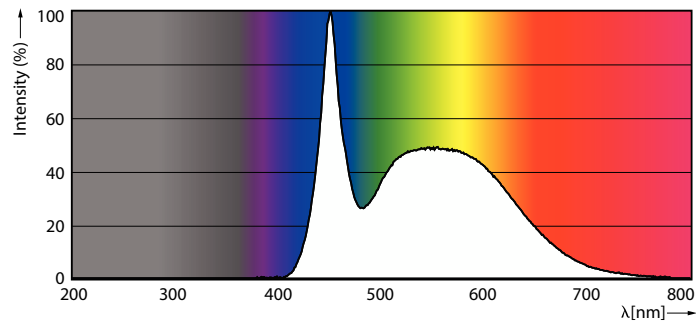


Spectral Power Distribution Colour - CorePro candle ND 5-40W E14 865 B35 FR

General uniform lighting - CorePro candle ND 5-40W E14 865 B35 FR

CorePro Plastic LEDcandles & lusters

Photometric data

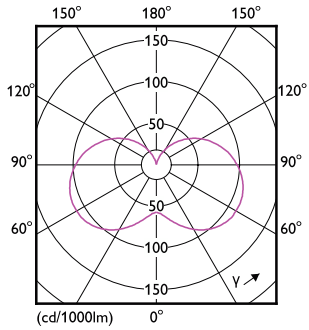

Light Distribution Diagram - CorePro candle ND 5-40W E14 865 B35 FR

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram - CorePro candle ND 5-40W E14 865 B35 FR

