



CorePro LEDtube EM/ Mains T8



CorePro LEDtube 1500mm 20W 865 T8

The CorePro LEDtube is an affordable LED solution suitable for replacing T8 fluorescent lamps. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

Warnings and Safety

• -

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Nominal lifetime	50,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LED
Flux measurement reference	Sphere

Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	240 degree(s)
Luminous Flux	2,200 lm
Color Designation	Cool Daylight
Luminous Efficacy (rated) (Nom)	110 lm/W
Correlated Color Temperature (Nom)	6500 K
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.9
Photobiological safety according to EN 62471	RG0

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	20 W
Lamp Current (Nom)	105 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	58 W
Ballast Compatibility	EM/Mains

CorePro LEDtube EM/Mains T8

Temperature

Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	60 °C

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,500 mm
Bulb Shape	T8

Approval and Application


Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate

Energy Consumption kWh/1000 h	20 kWh
EPREL Registration Number	1827704
CE mark	Yes
EU RoHS compliant	Yes

Product Data



Order product name	CorePro LEDtube 1500mm 20W 865 T8
Full product name	CorePro LEDtube 1500mm 20W 865 T8
Full product code	871951445983000
Order code	45983000
Material Nr. (12NC)	929003547502
Net Weight (Piece)	0.220 kg
EAN/UPC - Product/Case	8719514459830
Numerator - Packs per outer box	20
EAN/UPC - Case	8719514459847

Dimensional drawing

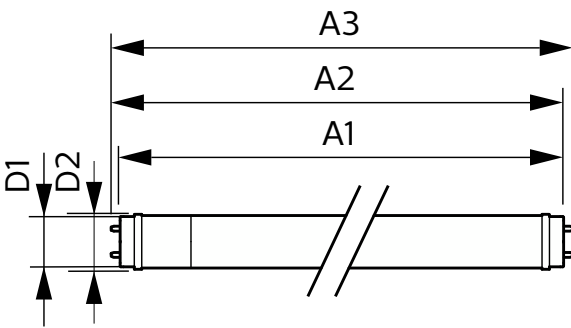

Product	D1	D2	A1	A2	A3
CorePro LEDtube 1500mm 20W 865 T8	25.7 mm	28 mm	1,500 mm	1,507.1 mm	1,514.2 mm

Photometric data

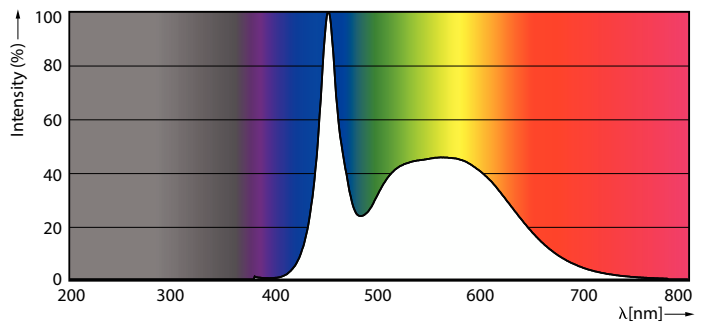


General uniform lighting - CorePro LEDtube 1500mm 20W 865 T8

Spectral Power Distribution Colour - CorePro LEDtube 1500mm 20W 865 T8


CorePro LEDtube EM/Mains T8

Photometric data

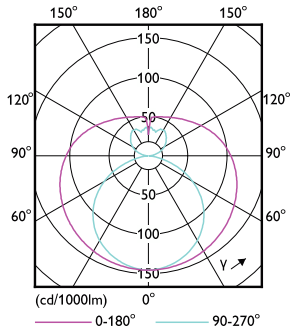



Light Distribution Diagram - CorePro LEDtube 1500mm 20W 865 T8

Lifetime

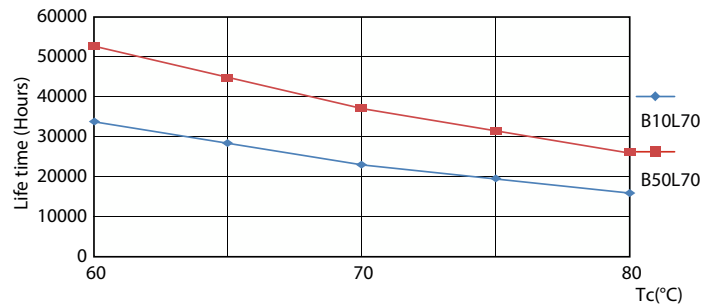

Life Expectancy Diagram

LifetimeVsTc

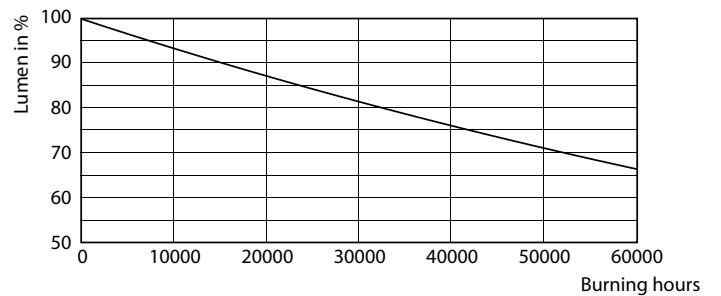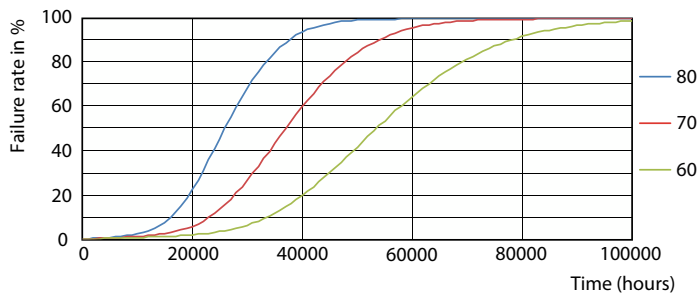

FailureRate

Lumen Maintenance Diagram - CorePro LEDtube 1500mm 20W 865 T8

CorePro LEDtube EM/Mains T8

